


LCD
3 PANEL

SONY®

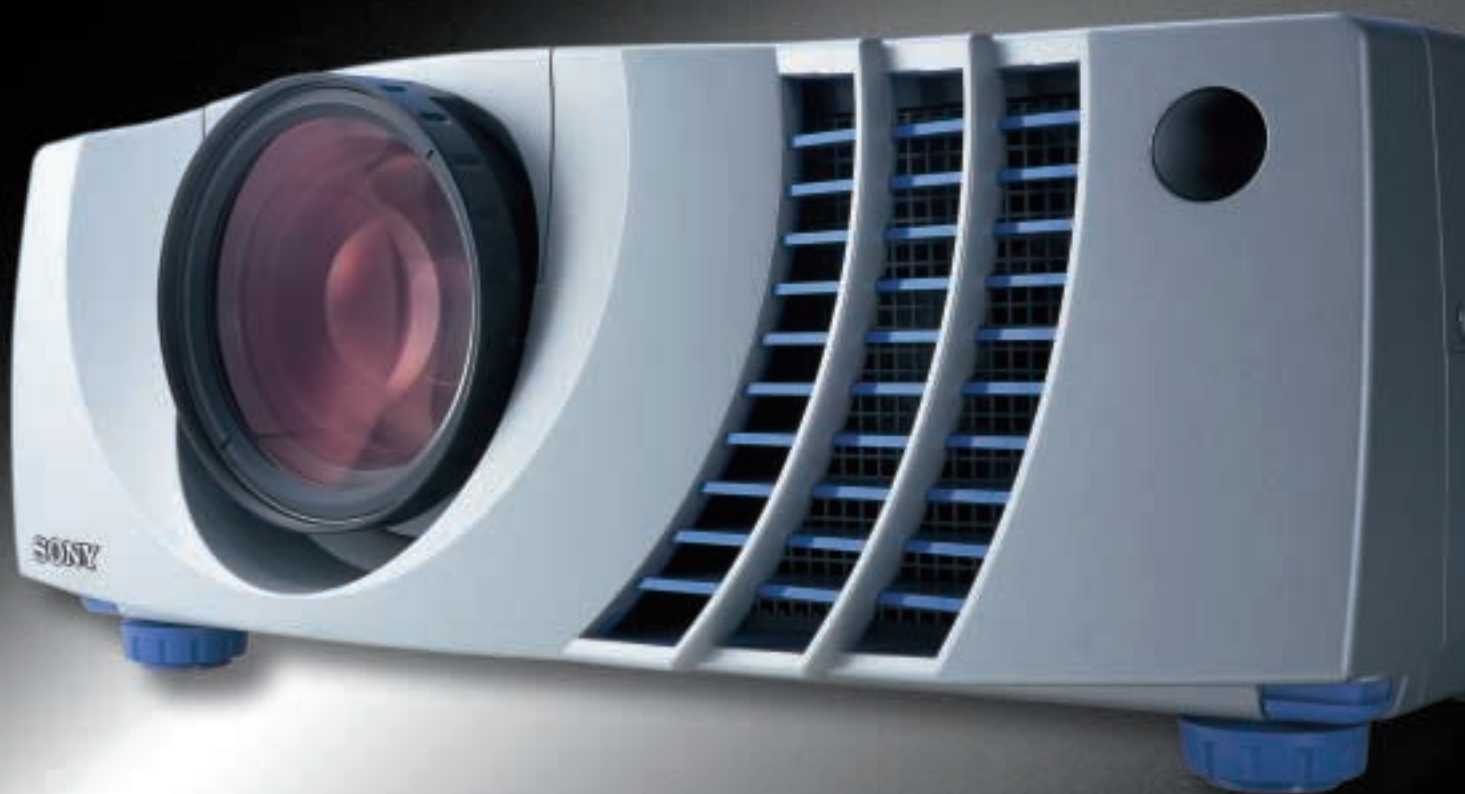

UPL-PX30/PX20

SUPERBRIGHT™ PORTABLE LCD DATA PROJECTOR

Keys to Powerful Presentations

– provided by the Sony VPL-PX30/PX20 LCD Projector

Visuals – Leave a lasting impression.

With 2400 ANSI lumens, it is easy to see your presentation in any environment. And the Advanced APA, 3D Gamma Correction, RGB Enhancer, and Digital Keystone features will make your pictures look their best.

Audio – Complete the experience.

A three-way stereo speaker system will support your visuals.

Presentation tools – Make life easier for you and your audience.

PROJECTOR STATION software, USB functions keys, digital zoom, and a laser pointer will help you make your presentations run smoothly. And keep your audience involved. Your main presentation tool – your projector – should go unnoticed. The VPL-PX30/PX20 is almost silent.

Flexibility – Don't settle for less.

The VPL-PX30/PX20 offers three optional lenses, suspension support for ceiling mounting, and an extensive array of inputs that let you choose what signal to use.

For Powerful Presentations . . . the VPL-PX30/PX20



Picture Quality

Brightness and Resolution

Combining Sony three-panel LCD technology and a new 200 W UHP lamp, the VPL-PX30 offers an outstanding brightness of 2400 ANSI lumens. The VPL-PX20, with an impressive 1400 ANSI lumens, provides an excellent alternative for situations not requiring installation-level brightness.



To complement their high brightness levels, both the VPL-PX30 and VPL-PX20 utilize three 1.3-inch LCD panels to provide true XGA resolution.

Advanced APA (Auto Pixel Alignment)

In addition to adjusting dot phase, the new advanced APA also performs shift and size adjustments with the touch of a button.

3D Gamma Correction

The 3D Digital Gamma correction circuit provides superb gray scale reproduction and, at the same time, helps to improve overall picture uniformity.

RGB Enhancer

For a crisp RGB image, the VPL-PX30/PX20 is equipped with an RGB Enhancer function. A simple adjustment provides heightened image quality to match any image source – whether text, photos, or graphics.

Effective Presentations

The VPL-PX30/PX20 makes effective presentations as simple as possible with a variety of advanced features. And with fan noise of less than 34dB, the your audience will hear the presentation, not the projector.

Digital Zoom

The VPL-PX30/PX20 is equipped with a 4-times Digital Zoom that is easily controlled via the supplied RM-PJM610 Remote Commander unit. With Digital Zoom function, you can focus in on a section of your presentation for more detail.

USB Hub Function

Thanks to the hot plug-and-play USB hub function, a VPL-PX30/PX20 system is easily expanded. Using the supplied PROJECTOR STATION USB Application Software, the projector can be controlled by a connected computer.

PROJECTOR STATION

– Improving integration between projector and computer



PROJECTOR STATION* software from Sony will make your presentations go off without a hitch. Not only does this software let you control the VPL-PX30/PX20 from your computer, it also helps you organize your presentation materials for quick access, using the two function keys on the Remote Commander unit.

* PROJECTOR STATION software requirements:
Microsoft® Windows® 98 operating system.

Help Menu

The on-screen Help Menu of the VPL-PX30/PX20 will assist in trouble-shooting during operation. Easy-to-follow prompts will guide you to the solution of your problem.



Remote Commander Unit

The laser pointer-equipped Remote Commander unit lets you direct your audience's attention and guide them through your presentation.



RM-PJM610
Remote Commander Unit

Stereo Sound

A three-way speaker system provides stereo sound to complement your presentation visuals.



Flexibility

The VPL-PX30/PX20 is designed for use in a variety of environments. Even with its portable design, it functions equally well when installed for ceiling, floor, or rear projection use.

Digital Keystone

Keystone distortion, caused when the projection angle is not properly calibrated, can be easily corrected within the wide adjustment range of ± 20 degrees via the on-screen menu.

Signal Support

For added versatility, the VPL-PX30/PX20 accepts a wide range of input signals: Composite Video, S Video, Y/R-Y/B-Y, YPbPr, and RGB, with a horizontal frequency of 15 to 91 kHz and a vertical frequency of 43 to 85 Hz. Anticipating the move from analog to digital, a Digital RGB input has also been added. Finally, to meet the demands of DTV, a variety of digital signals (480/60P, 575/50P, 1080/50I, 720/60P, 720/50P) are also fully supported.



Optional Lenses


Three optional lenses are available, giving you the ability to customize the VPL-PX30/PX20 to perfectly suit your projection environment.

Lamp Power Selection

The lamp power of the VPL-PX30/PX20 is selectable via the on-screen Lamp Mode menu. When set to LOW, lamp life is approximately doubled and fan noise is further reduced. Yet the VPL-PX30 still produces an impressive 1800 ANSI lumens. When set to LOW, the VPL-PX20 produces 1050 ANSI lumens.

On-Screen Display

The all-new on-screen display menu is available in seven languages.

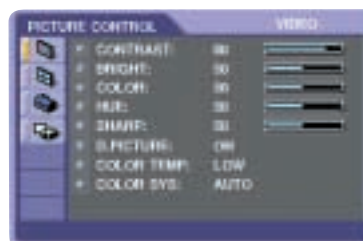




Specifications

Model		VPL-PX30	VPL-PX20
Optical	Projection system	3 LCD panels, 1 lens projection system	
	LCD panel	1.3-inch p-Si TFT Sony LCD panel 2,359,296 pixels (786,432 pixels x 3)	
		with Micro Lens Array	without Micro Lens Array
	Projection lens	Approx. 1.3 times zoom lens, F1.7 to 2.0, f 36.7 to 47.8 mm	
	Lamp	200 W Ultra High Performance Lamp	
Signals	Screen coverage	40 to 300 inches (viewable area, measured diagonally)	
	Light output	2400 ANSI lumens ^{*1}	1400 ANSI lumens
	Color system	NTSC, PAL, SECAM, NTSC4.43, PAL-M, PAL-N (automatically/manually selected)	
	Resolution	Video: 750 TV lines, RGB: 1024 x 768 pixels	
	Acceptable signals	RGB (fH 15 to 91 kHz, fV: 43 to 85 Hz), 15 kHz component 50/60 Hz system, Progressive component 60 Hz system, DTV (480/60P, 575/50P, 1080/50i, 720/60P, 720/50P), Composite video, Y/C video	
General	Cabinet color	Silky Silver / Turquoise Blue	
	Speaker	Max. 5 W Wide frequency range 3 speakers Woofer: 65 mm (2 5/8 inches) diameter, Max. 3 W Tweeter: 45 mm (1 3/16 inches) diameter, Max. 1 W x 2 (Stereo)	
	Power requirements	100 to 240 V, 50/60 Hz	
	Power consumption	Max. 290 W, STAND-BY 5 W, Power saving mode 50 W	
	Operating temperature	0 to 40 °C (32 to 104 °F)	
	Operating humidity	35 to 85 %	
	Dimensions	339 (W) x 142 (H) x 335 (D) mm (13 3/8 x 5 5/8 x 13 1/4 inches)	
	Mass	Approx. 7.2 kg (15 lb 14 oz)	
	Heat dissipation	989.6 BTU	
	Fan noise	Less than 34 dB (when lamp mode set to LOW: 30 dB)	
Inputs/Outputs			
VIDEO IN	Composite	Phono type, 1 Vp-p $\pm$ 2 dB sync negative, 75 Ω	
	Y/C IN	Mini DIN 4-pin	
INPUT A	Y	1 Vp-p $\pm$ 2 dB sync negative, 75 Ω	
	C	Burst 0.286 Vp-p $\pm$ 2 dB (NTSC), 75 Ω or 0.3 Vp-p $\pm$ 2 dB (PAL), 75 Ω	
	Analog RGB	HD D-sub 15 pin (Female)/5 BNC (Female)/Digital Interface Switched	
	R	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G with Sync	1.0 Vp-p $\pm$ 2 dB sync negative, 75 Ω	
	B	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	SYNC/HD		
	Composite sync	1 to 5 Vp-p, high impedance positive/negative	
	Horizontal sync	1 to 5 Vp-p, high impedance positive/negative	
INPUT B	VD		
	Vertical sync	1 to 5 Vp-p, high impedance positive/negative	
	Analog RGB/Component	5 BNC (Female)	
	R/R-Y/Pr	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G with Sync/Y	1.0 Vp-p $\pm$ 2 dB sync negative, 75 Ω	
	B/B-Y/Ps	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	SYNC/HD		
	Composite sync	1 to 5 Vp-p, high impedance positive/negative	
	Horizontal sync	1 to 5 Vp-p, high impedance positive/negative	
OUTPUT	VD		
	Vertical sync	1 to 5 Vp-p, high impedance positive/negative	
	Digital RGB	DFP 20 pin (TMDS)	
	USB HUB	Up (B type: Female) x 1, Down (A type: Female) x 1	
	MOUSE IN	Square 13 pin (Female)	
	AUDIO IN	Stereo mini jack, 500 mV rms, impedance more than 47 k Ω	
	Analog RGB	HD D-sub 15 pin (Female)	
	R	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	G with Sync	1.0 Vp-p $\pm$ 2 dB sync negative, 75 Ω	
REMOTE CONTROL S IN/ PLUG IN POWER	B	0.7 Vp-p $\pm$ 2 dB positive, 75 Ω	
	SYNC/HD		
	Composite sync	1 to 5 Vp-p, high impedance positive/negative	
	Horizontal sync	1 to 5 Vp-p, high impedance positive/negative	
	VD		
	Vertical sync	1 to 5 Vp-p, high impedance positive/negative	
	MOUSE IN	Square 13 pin (Female)	
	AUDIO IN	Stereo mini jack, 500 mV rms, impedance more than 47 k Ω	
	MONITOR OUT*2	HD D-sub 15 pin (Female)	
		R/R-Y, G/Y, B/B-Y: Gain Unity, 75 Ω	
Safety regulations	AUDIO OUT (Variable out)	Stereo mini jack, max. 1 V rms, when the input signal is 500 mV rms, impedance less than 5 k Ω	
	RS-232C	D-sub 9 pin (Female)	
Laser beam	Laser type	Class II	
	Wavelength	645 nm	
Supplied accessories	Output	1 mW	

^{*1} ANSI lumens is a measuring method of the American National Standards Institute IT7.228. ^{*2} DIGITAL RGB signal is not output from the MONITOR OUT terminal. ^{*3} Not available in some areas. For details, please contact your nearest Sony office.

Dimensions

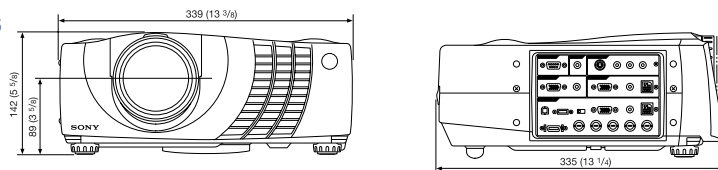

Input Signal Preset Data

No.	Resolution		fH (kHz)	fV (Hz)	H/V
1	Video 60 Hz		15.734	59.940	N/N
2	Video 50 Hz		15.625	50.000	N/N
3	15 K RGB/Component 60 Hz		15.734	59.940	SonG
4	15 K RGB/Component 50 Hz		15.625	50.000	SonG
5	HDTV				
6	1035x1080/60i	1035/60i, 1080/60i	33.750	60.000	SonG
7	640x350	VGA-1	31.469	70.086	P/N
8	640x400	VGA VESA 85	37.861	85.080	P/N
9		NEC PC98	24.823	56.416	N/N
10		VGA-2/VESA 70	31.469	70.086	N/P
11		VGA VESA 85	37.861	85.080	N/P
12	640x480	VGA VESA 60	31.469	59.940	N/N
13		Mac 13	35.000	66.667	SonG
14		VGA VESA 72	37.861	72.809	N/N
15		VGA VESA 75	37.500	75.000	N/N
16		VGA VESA 85	43.269	85.008	N/N
17	800x600	SVGA VESA 56	35.156	56.250	P/P
18		SVGA VESA 60	37.879	60.317	P/P
19		SVGA VESA 72	48.077	72.188	P/P
20		SVGA VESA 75	46.875	75.000	P/P
21		SVGA VESA 85	53.674	85.061	P/P
22	832x624	Mac 16	49.724	74.550	N/N
23	1024x768	XGA VESA 43	35.524	43.479	P/P
24		XGA VESA 60	48.363	60.004	N/N
25		XGA VESA 70	56.476	69.955	N/N
26		XGA VESA 75	60.023	75.029	P/P
27		XGA VESA 85	68.677	84.997	P/P
28	1152x864	SXGA VESA 70	63.995	70.019	P/P
29		SXGA VESA 75	67.500	75.000	P/P
30		SXGA VESA 85	77.487	85.057	P/P
31	1152x900	SUN LO	61.795	65.960	N/N
32		SUN HI	71.713	76.047	CNeg
33	1280x960	SXGA VESA 60	60.000	60.000	P/P
34		SXGA VESA 75	75.000	75.000	P/P
35	1280x1024	SXGA VESA 43	46.433	43.436	P/P
36		SGI-5	53.316	50.062	SonG
37		SXGA VESA 60	63.974	60.013	P/P
38		SXGA VESA 75	79.976	75.025	P/P
39		SXGA VESA 85	91.146	85.024	P/P
40	P. Component				
41	480/60P	480/60P(2x NTSC)	31.470	60.000	SonG
42	575/50P	575/50P(2x PAL)	31.250	50.000	SonG
43	1080/50i	1080/50i	28.130	50.000	
44	720/60P	720/60P	45.000	60.000	
45	720/50P	720/50P	37.500	50.000	

Optional Accessories

Projector lamp
LMP-P200
(for replacement)

Carrying case
VLC-600^{*3}

Suspension support
PSS-610

Monitor cables
SMF-400
SMF-410

Signal cable
SMF-401

Digital signal cables
SMF-D102
SMF-D110

Mouse cables
SIC-S20 (for Mac®)
SIC-S21 (for Serial)
SIC-S22 (for PS/2)

Macintosh® adaptor
ADP-20
(Macintosh® to VGA)




LMP-P200

50-inch portable screen
VPS-50C^{*3}

Optional lenses
VPLL-FM21
(Fixed short focus lens)
VPLL-ZM31
(Short focus zoom lens)
VPLL-ZM101
(Long focus zoom lens)

Throwing Distance

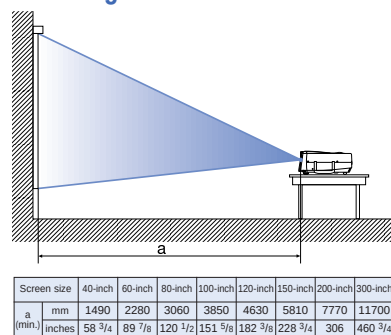

Distributed by

©1999 Sony Electronics Inc. Reproduction in whole or in part without written permission is prohibited. All rights reserved. Features and specifications are subject to change without notice. All non-metric weights and measures are approximate. Sony and Remote Commander are trademarks of Sony. Macintosh and Mac are registered trademarks of Apple Computer, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation.